




Night Flash

Center Line Indicator

ACB-04WS-S · ACB-04WS-C · ACB-14OS-S · ACB-14OS-C
ACB-14YS-S · ACB-14YS-C



ACB-04WS-S
ACB-04WS-C

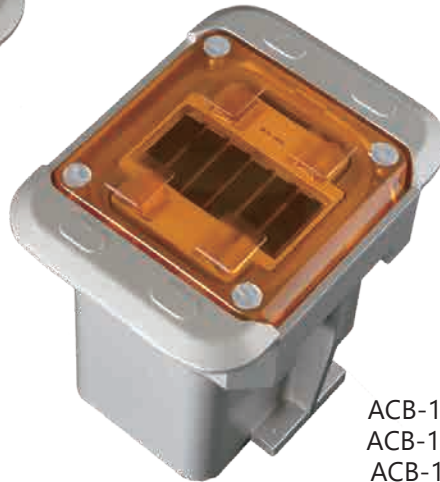

ACB-14OS-S
ACB-14OS-C
ACB-14YS-S
ACB-14YS-C

■ Compact and low price.

A compact design as well as a low price have been achieved.

■ A design with more safety considerations.

Incorporating multiple technologies, a high degree of visibility has been realized so that even dangerous curves can be assessed from a distance.

■ Dual product line caters to types of center line.

Two types of indicator are offered for use on curves. One is suitable for the straight lines, the other for the curved lines themselves.

Installation Example



Night Flash

Center Line Indicator

Specifications

ITEM		CONTENT		
Product Type		ACB-04WS-S ACB-04WS-C	ACB-14OS-S ACB-14OS-C	ACB-14YS-S ACB-14YS-C
Outer Dimention/Weight		130 x 97 x 84 (mm) / 0.9 k g		
In-Ground Diameter/Depth		Diameter ϕ 127.5 / Depth 84mm		
Hight from Ground(about)		5mm		
Water Resistance		JIS C0920 7class		
Installation Site		Roads and other applicable sites		
Top Cover		Clear	Yellow	
LED	Type	White LED	Orange LED	Yellow LED
	Quantity	4pcs (2side 2 lights)		
Luminescent Operation	Method	Simultaneous Flasing		
	Flashing Frequency	about 140times / minutes		
	Operational Period	All Night (about 15 hours)		
Solar Cellss Maximum Output		about 150mW		
Secondary Power Source		Electric Double Layer Capacitor		
Operating Temperature		-20°C~70°C		

